
GETTING STARTED WITH SWING AND SLIDE GATE OPERATOR.

Always design, install and maintain safe gate access systems in accordance with UL 325 & ASTM F2200 standards,


- Only install the operator on gates used for vehicular traffic.
- A separate pedestrian entry/exit must be clearly visible to promote pedestrian usage and located so pedestrians do not come in contact with the vehicular gate while it is moving.
- Install two independent[†] entrapment protection devices protecting each entrapment zone.
- Pickets of a slide gate must be designed or screened to prevent persons from reaching through, or passing through a gate.
- Every Installation is unique. It is the responsibility of the installer to ensure all entrapment zones are protected with a minimum of two independent[†] entrapment protection devices.
- Beginning August 1, 2018, for a slide gate operator to function, the operator will require a minimum of two independent[†] monitored safety entrapment protection devices in each direction: two in the open direction, two in the close direction.

[†]Independent the same type of device shall not be utilized for both entrapment protection devices

SLIDE GATE SITE LAYOUT GUIDELINES FIGURE 1

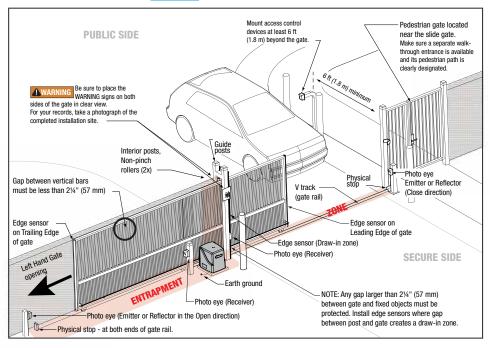

SWING GATE SITE LAYOUT GUIDELINES FIGURE 4

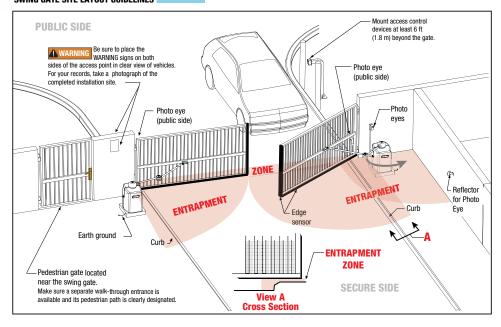

**Swing Gate Entrapment Zones: Locations between a moving gate or moving, exposed operator components and a counter opposing edge or surface where entrapment is possible up to 1.8m (6 ft) above grade. Such locations occur if during any point in travel: a) The gap between the bottom of a moving gate and the ground is greater than 101.6mm (4 in), and less than 406mm (16 in); or b) The distance between the center line of the pivot and the end of the wall, pillar, or column to which it is mounted when in the open or closed position exceeds 101.6mm (4 in). Any other gap between a moving gate and fixed counter opposing edges or surfaces or other fixed objects is less than 406mm (16 in) (examples are walls, curbs, berms, or other immovable objects).

The above examples are two of many installation possibilities and are for illustration purposes only See device and operator manuals for complete instruction.

Visit DAMSA.com for more information.


SLIDE GATE SPACING GUIDELINES FIGURE 2

Slide Gate Gaps


A gap, measured in the horizontal plane A gap, measured in the nonzontal plane parallel to the roadway, between a fixed stationary object nearest the roadway (such as a gate support post) and the gate frame when the gate is in either the fully open position or the fully closed position, shall not exceed 2 1/4 in.. Exception: All other fixed stationary objects greater than 16 in. from the gate frame shall not be required to comply with this section. Any gap must be protected. Install safety device to protect draw-in zone.

SLIDE GATE OPENINGS GUIDELINES FIGURE 3

Openings of a horizontal slide gate must be smaller than 2 1/4" e be guarded or screened. These design rules apply to both the moving gate as well as the portion of adjacent fence that the gate covers in the open position. See Illustrations



If gaps (xxx) en vertical bars of the gate or fence are less than 2 1/4", no further screening is required.



For gaps (xxx) equal to or larger than 2 1/4", a wire mesh screen must be applied to the gate. Wire mesh screen openings must be smaller than 2 1/4". The minimum height of wire mesh screen 6 ft. above grade.

Base of Swing and Slide Gate FIGURE 5

All Gates must have smooth bottom edges, no protrusions should exist. If gate hardware or sensors protrude, they must have smooth surfaces free of any sharp cutting edges that do not exceed 1/2 inch beyond the base of the gate

Definitions

Entrapment: The condition when a person is caught or held in

obstition that increases the risk of injury.

ide Gate Entrapment Zones: An entrapment zone exists if any point during travel, the gap between the moving gate of fixed counter opposing edges or surfaces is less than 406 mm (16") in a location up to 1.8 m (6ft.) above grade.

